

4

EABC 80

6T8

6LD12

6AK8


DH719

235 D₃



D₂

KOLÍK ZASOUVAT POSTUPNĚ
PLUG TO BE PUSHED
IN SUCCESSIVELY

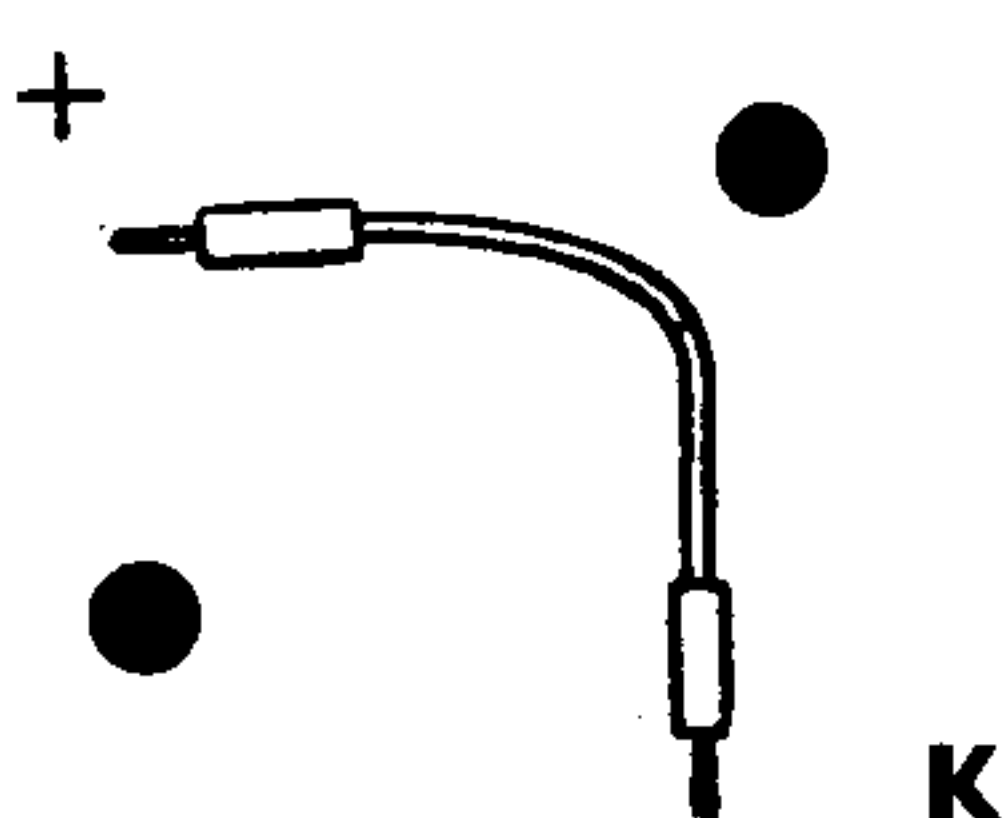

ZKRAT FK
NENÍ ZÁVADA
SHORT F-K
NOT CONSIDERED
AS DEFAULT

E_a = 1,5 V ●

NEMĚŘIT V POLOZE
„S“ A „VAKUUM“
NOT TO BE MEASURED
IN THE POSITION
“S” AND “VACUUM”

V_f = 6,3 V ●

I = 5 mA ●

● DIODY D₂, D₃
DIODES D₂, D₃

5 mA

